


AM Series PUSH-AROUND VERTICAL LIFTS

Quick-Change Platforms

Change your platform—without any tools—in less than a minute, to suit your specific application needs.

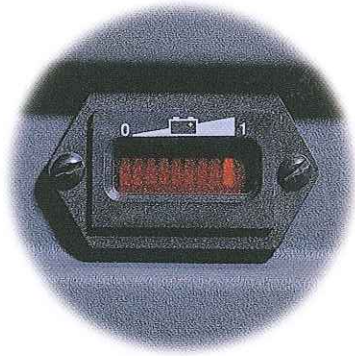


Power Management System

With easy access to the battery and a battery charge indicator, you'll always know just how much juice you have to stay productive.



AMI and AM Series SPECIFICATIONS



Main Features


- Low-maintenance anodized mast.
- 110 volt double receptacle in platform.
- Auto power saver—shuts off power when idle.
- Lanyard attachment anchor for body harness.
- Non-marking tires.
- Quick-change platform mounts.
- Quick-change 26 in. W x 28 in. L (66 x 71 cm)—gull-wing entry platform.
- Roller loading device: for loading on pickup trucks—AM models only.

	15AMI	19AMI
AMI Series Push-Around Vertical Lifts		
Platform Height	15 ft (4.57 m)	19 ft 4 in. (5.89 m)
Platform Capacity	350 lb (159 kg)	350 lb (160 kg)
Overall Height Stowed	77.5 in. (1.97 m)	78 in. (1.98 m)
Outrigger Footprint (LxW)	n/a	n/a
Turning Radius	820 lb (372 kg)	n/a
Weight	910 lb (413 kg)	1,130 lb (513 kg)

Available Options

26 x 26 Right Side Entry (Slide Bar)	•	•
Narrow Quick-Change Platform ¹	•	•
Extension Quick-Change Platform ²	•	•
Tool Tray ³	•	•
Fluorescent Light Tube Caddy ⁴	•	•

1. 22 in. W x 22 in. L (not available on 41AM).
 2. 26 in. W x 26 in. L—Retracted, 26 in. W x 49 in. L—Extended (AMI Only; 300 lb capacity).
 3. 8 in. W x 18 in. L x 5 in. D—Hangs from top platform rail.
 4. Hangs from top platform rail.



Main Features

- Low-maintenance anodized mast.
- 110 volt double receptacle in platform.
- Auto power saver—shuts off power when idle.
- Lanyard attachment anchor for body harness.
- Non-marking tires.
- Quick-change platform mounts.
- Quick-change 26 in. W x 28 in. L (66 x 71 cm)—gull wing entry platform.
- Roller loading device: for loading on pickup trucks—AM models only.

	20AM	25AM	30AM	36AM	41AM
AM Series Push-Around Vertical Lifts					
Platform Height	20 ft 5 in. (6.22 m)	25 ft 2 in. (7.67 m)	29 ft 10 in. (9.09 m)	36 ft 3 in. (11.05 m)	40 ft 9 in. (12.42 m)
Platform Capacity	350 lb (159 kg)	350 lb (159 kg)	350 lb (159 kg)	300 lb (136 kg)	300 lb (136 kg)
Overall Height Stowed	77.5 in. (1.97 m)	77.5 in. (1.97 m)	77.5 in. (1.97 m)	104 in. (2.64 m)	104 in. (2.64 m)
Outrigger Footprint (LxW)	62 x 53 in. (1.57 x 1.35 m)	62 x 53 in. (1.57 x 1.35 m)	68 x 61 in. (1.73 x 1.55 m)	79 x 79 in. (2.01 x 2.01 m)	79 x 79 in. (2.01 x 2.01 m)
Weight (AC)	740 lb (336 kg)	825 lb (374 kg)	890 lb (404 kg)	1,060 lb (481 kg)	1,160 lb (526 kg)
Weight (DC)	860 lb (390 kg)	905 lb (411 kg)	940 lb (426 kg)	1,100 lb (499 kg)	1,230 lb (588 kg)

Available Options

26 x 26 Right Side Entry (Slide Bar)	•	•	•	•	•
Narrow Quick-Change Platform ¹	•	•	•	•	•
Extension Quick-Change Platform ²	•	•	•	•	•
Straddle Kit ³ —AM Models Only—Includes Ladder	•	•	•	•	•
43 in. (1.09 m) Clearance	•	•	•	•	•
55 in. (1.4 m) Clearance	•	•	•	•	•
Straddle Outrigger Interlock Adapter ³ —Mounts on the AM Lift (AM only)	•	•	•	•	•
Tool Tray ⁴	•	•	•	•	•

1. 22 in. W x 22 in. L (not available on 41AM).
 2. 26 in. W x 26 in. L—Retracted, 26 in. W x 49 in. L—Extended (AMI Only; 300 lb capacity).
 3. JLG recommends the 26 x 26 right side entry platform and straddle outrigger interlock adaptor with this option.
 4. 8 in. W x 18 in. L x 5 in. D—Hangs from top platform rail.

For complete specifications, visit www.jlg.com